



Cable Lugs and Connectors

Product Catalogue

Also available:

- ABC Accessory Catalogue
- Heat Shrink Catalogue

01/17

Copper Lugs & Connectors

Copper Crimp Lug	02-10
Copper Crimp Lug, With Bell Mouth	11-12
Copper Crimp Lug, Narrow Palm	13
Copper Crimp Connector to DIN	14
Copper Crimp Connector	15-16
"C" Type Connector	17



AUS, Copper Crimp Lug to DIN


- Clear markings on barrel to indicate correct crimping location

- In accordance with DIN 46235

Material: Cu ≥ 99.9%

Surface: electro tin plated

Application: medium voltage

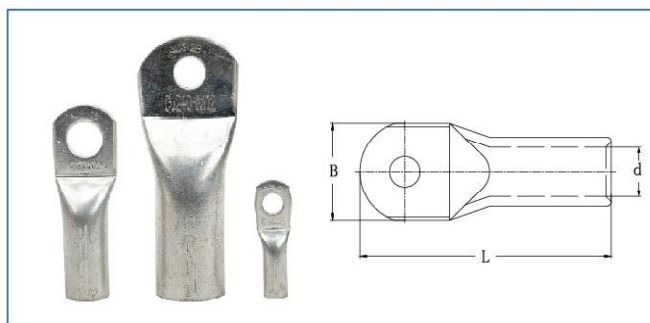

Type	Conductor Size (mm ²)	Dimension			Stud Size	Pack(pcs)	Weight (Kg) 100pcs	Crimping Die
		L(mm)	d(mm)	B(mm)				
AUS6-5	6	33	3.8	8.5	M5	2,000	0.27	DT5
AUS6-6		34.5	3.8	9	M6		0.26	
AUS6-8		37	3.8	13	M8		0.28	
AUS10-5	10	36	4.5	9	M5	1,500	0.32	DT6
AUS10-6		37.5	4.5	9	M6		0.34	
AUS10-8		40	4.5	13	M8		0.33	
AUS16-6	16	46.5	5.5	13	M6	500	1.11	DT8
AUS16-8		49	5.5	13	M8		1.20	
AUS16-10		51	5.5	17	M10		1.17	
AUS25-6	25	48.5	7	14	M6	400	1.42	DT10
AUS25-8		51	7	16	M8		1.50	
AUS25-10		53	7	17	M10		1.50	
AUS25-12		54	7	19	M12		1.46	
AUS35-6	35	52.5	8.2	17	M6	200	2.81	DT12
AUS35-8		55	8.2	17	M8		2.84	
AUS35-10		57	8.2	19	M10		2.84	
AUS35-12		58	8.2	21	M12		2.81	
AUS50-8	50	65	10	20	M8	150	4.20	DT14
AUS50-10		67	10	22	M10		4.25	
AUS50-12		68	10	24	M12		4.43	
AUS50-16		71	10	28	M16		4.19	
AUS70-8	70	68	11.5	24	M8	100	5.73	DT16
AUS70-10		70	11.5	24	M10		5.86	
AUS70-12		71	11.5	24	M12		5.68	
AUS70-14		72.5	11.5	24	M14		5.43	
AUS70-16		74	11.5	30	M16		6.08	

Type	Conductor Size (mm ²)	Dimension			Stud Size	Pack(pcs)	Weight (Kg) 100pcs	Crimping Die
		L(mm)	d(mm)	B(mm)				
AUS95-8	95	80	13.5	28	M8	70	8.86	DT18
AUS95-10		80	13.5	28	M10		8.73	
AUS95-12		81	13.5	28	M12		8.66	
AUS95-14		82.5	13.5	28	M14		8.7	
AUS95-16		84	13.5	32	M16		9.05	
AUS120-10	120	85	15.5	32	M10	60	11.2	DT20
AUS120-12		86	15.5	32	M12		11.13	
AUS120-14		88.5	15.5	32	M14		11.45	
AUS120-16		89	15.5	32	M16		11.27	
AUS150-10	150	93	17	34	M10	40	16.23	DT22
AUS150-12		94	17	34	M12		16.22	
AUS150-14		97	17	34	M14		16.33	
AUS150-16		97	17	34	M16		15.8	
AUS185-10	185	97	19	37	M10	35	18.5	DT25
AUS185-12		98	19	37	M12		18.42	
AUS185-14		101	19	37	M14		18.77	
AUS185-16		101	19	37	M16		18.52	
AUS185-20		104	19	40	M20		18.35	
AUS240-12	240	108	21.5	42	M12	25	26.26	DT28
AUS240-14		111	21.5	42	M14		26.7	
AUS240-16		111	21.5	42	M16		26.57	
AUS240-20		114	21.5	45	M20		26.5	
AUS300-12	300	119	24.5	48	M12	20	32.8	DT32
AUS300-14		119	24.5	48	M14		32.6	
AUS300-16		119	24.5	48	M16		31.8	
AUS400-16	400	140	27.5	55	M16	8	66.35	DT38
AUS400-20		140	27.5	55	M20		64	
AUS500-14	500	150	31	60	M14	8	78.97	DT42
AUS500-16		150	31	60	M16		78.57	
AUS630-16	630	160	34.5	64	M16	8	79	DT44